

Dairy Sort Gate

Automated sorting so you can focus on cow management

Tru-Test Dairy Sort Gate automatically sorts pre-selected cows as they exit the parlor. Our patented ID My Cow technology ensures exceptional sorting accuracy in high noise environments and provides confirmation that cows have been separated from the herd.

- Automatically sorting cows by their Tru-Test Active Tag saves hours of unproductive time searching for cows
- Decrease herd lockup times and increase milk production by sorting only the cows you need, when you need them
- Integrate automatic sorting into daily parlor routines to reduce cow stress
- Build sort lists in advance for scheduled activities such as pregnancy check, group moves, sync programs and more
- Know which cows were separated with confirmation of animals seen and animals sorted after each milking
- Designed for use with rapid exit, herringbone, or rotary parlors



Powered by Datamars Livestock.

- Build sort lists in advance from anywhere in the world.
- Share farm access with multiple users, with the ability to control their access level.
- The Dairy Sort Gate helps automate management activities and action insights from our Active Tag System.
- Integrate your Dairy Sort Gate to your farm management package effortlessly.
- Consolidate all your farm data in one place, combining insights from Active Tag, autonomous weighing, calving dates, pregnancy scans, and inseminations to enable informed decisionmaking.

Our team provides training to ensure you get the most from our system. And if you have any questions, our support team is only a call away.

Livestock monitoring. Made easy.

www.tru-test.com



FEATURES AND SPECIFICATIONS

- Exceptional accuracy with ID My Cow to only sort the cows you want.
- Three-way sorting (left, right, center) with pneumatic, quiet gates that are gentle on cows.
- ✓ Intelligent saloon gate that only activates when required, promoting smooth cow flow.
- Sort non-tagged cows from the herd so you don't omit cows with damaged or missing tags.
- Engineered for strength and durability with hot dipped galvanized steel.
- Bearing gate hinges for endurance and quiet operation.
- Connect via Ethernet, Wi-Fi, or LTE (4G).

Dimensions

15.45' length x 3.44' width x 7.45' height

AC powered


240 V or 110 V

Ideal cow approach alley length

We recommend at least 16 ft of single file alley before the sort gate. This slows cow flow enough and aids in single file entry.

Ideal exit alley length

We recommend at least 6.5 ft of alley after the sort gate to aid cow flow.

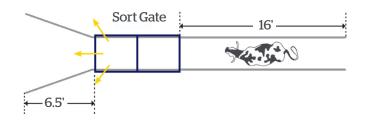

Order Information					
Sort 3-way: LTE		Sort 3-way: WIFI		Sort 3-way: ETHERNET	
EID	ID My Cow	EID	ID My Cow	EID	ID My Cow
880 0004-913	880 0004-919	880 0004-914	880 0004-920	880 0004-915	880 0004-921
Sort 2-way: LTE		Sort 2-way: WIFI		Sort 2-way: ETHERNET	
EID	ID My Cow	EID	ID My Cow	EID	ID My Cow
880 0004-925	880 0004-931	880 0004-926	880 0004-932	880 0004-927	880 0004-933

Although the information presented in this Product Information Sheet is believed to be accurate and reliable, no responsibility for inaccuracies can be $assumed \ by \ Datamars \ Limited. Performance \ data \ is \ typical \ only \ and \ variations \ due \ to \ component \ manufacturing \ tolerances \ are \ normal.$ Datamars Limited reserves the right at any time to change performance characteristics or specifications without prior notice. $All\,trade marks\,with\,an\,^*\,are\,not\,owned\,by\,Data mars\,and\,belong\,to\,their\,respective\,owners.$ © Datamars Limited - All rights reserved.

Issue 3 10/24